

LATTICE 4160 PENDANT

PROJECTPROJET



SPEC TYPE

NOTES



4160-CO4160-CY4160-SP

MOUNTING OPTIONSOPTIONS DE MONTAGE

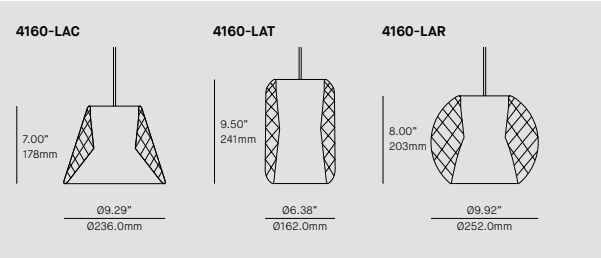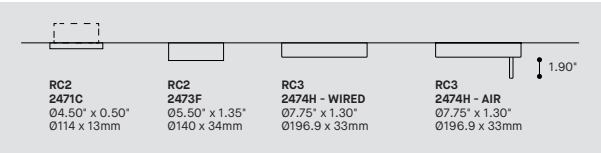

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODEL	MODÈLE	
4160-LAC	CONE	
4160-LAT	TUBE	
4160-LAR	ROUND	
LIGHT SOURCE	SOURCE LUMINEUSE	
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED	REGULAR OUTPUT	
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR	
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)	
90	90+ CRI	
VOLTAGE	VOLTAGE	
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION	OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
CONTROL OPTION	OPTION DE CONTRÔLE	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
* REQUIRES RC3 CANOPY * FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
EMERGENCY BATTERY	BATTERIE D'URGENCE	
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981E ACCESSORY IS REQUIRED		
STEM OR CABLE	TIGE OU CABLE	
C	CABLE, FIELD ADJUSTABLE	
S	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE	
STEM OR CABLE LENGTH	LONGUEUR DE TIGE OU CABLE	
60	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
**	36 36" STEM (STD LENGTH) 60 60" CABLE (STD LENGTH) ** CUSTOM STEM LENGTH (PLEASE SPECIFY) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING	MONTAGE (EX. CANOPY, TRACK)	
RC	ROUND CANOPY / PAVILLON ROND	
RC1	SCREWLESS 1.35" CANOPY (2473F)	
RC2*	SCREWLESS 0.5" CANOPY (2471C)	
RC3	NLIGHT SCREWLESS CANOPY 07.75" X 1.30" (2474H)	
* 3983 ACCESSORY PROVIDED		
MOUNTING OPTION	OPTIONS DE MONTAGE (EX. SLOPE CEILING ADAPTOR)	
ROUND CANOPY		
RC1	SCREWLESS 1.35" CANOPY (2473F)	
RC2	SCREWLESS 0.5" CANOPY (2471C)	
CANOPY FINISH	FINI CABLE ALIMENTATION	
MGE	METALLIC GRAY TEXTURE	
WHE	WHITE FINE TEXTURE	
STEM OR POWER CORD FINISH	FINI TIGE OU CABLE ALIMENTATION	
MGE	METALLIC GRAY TEXTURE (STEM ONLY)	
WHE	WHITE FINE TEXTURE (STEM ONLY)	
SSC	STAINLESS STEEL BRAIDED CABLE (CABLE ONLY)	
SHADE FINISH	FINI ABAT-JOUR	
ALU	NATURAL ALUMINUM FINISH	
DIFFUSER FINISH	FINI DIFFUSEUR	
CLR	CLEAR	
ACCESSORY	ACCESSOIRE	
3983	DEEP JUNCTION BOX (PROVIDED)	
ACCESSORY EMERGENCY BATTERY	ACCESSOIRE BATTERIE D'URGENCE	
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



LATTICE 4160-XX

7.0in
178mm

Ø9.3in
Ø236mm

9.5in
241mm

Ø6.4in
Ø162mm

8.0in
203mm

Ø9.9in
Ø252mm

8.0in
203mm

Ø9.9in
Ø252mm

METAL BRAIDED CABLE
Choose between a stainless steel braided cable or a solid stem for suspension.

FAMILY TRIO
3 models available

3D PRINTED HEATSINK
A custom design heatsink printed in aluminum allows for easy assembly

DONUT SHAPED LED
High quality LED board distributes an even light source through the fixture.

3D PRINTED DIFFUSER
A custom 3D printed plastic diffuser has a milky clear finish for a

3D METAL PRINTED SHADE
An intricate lattice shade surrounds the light source creating a magical glow.
Available in 3 classic shapes.

3D METAL PRINTING - FEATURES

- Laser metal fusion with ultra precise results
- Unique manufacturing capabilities
- Signature feel and texture
- 100% ALU6060 blend that lasts over time

— 4160-LAC

PRODUCT SPECIFICATION	4160-LAC	4160-LAR	4160-LAT
PERFORMANCE			
SYSTEM WATTAGE	15.9W	15.9W	15.9W
DELIVERED LUMENS DIRECT (4000K)*	583 LM	461 LM	374 LM
OTHER INFORMATIONS			
WEIGHT	7.4 LS / 3.4 KG	8.0 LBS / 3.7 KG	8.5 LBS / 3.9 KG
L70 (LUMEN MAINTENANCE) DIRECT	> 63 600 HRS	> 63 600 HRS	> 63 600 HRS
FIRE RATING	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17
MAX. LUMINANCE 45°-90° OF NADIR	1235 CD/M²	1088 CD/M²	954 CD/M²
LIGHT QUALITY	R9 > 50 (90 CRI OPTION)		

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

4160-LAC

4160-LAR

4160-LAT

Visit our website for warranty terms and conditions.

LATTICE 4160-XX

7.0in
178mm

Ø9.3in
Ø236mm

9.5in
241mm

Ø6.4in
Ø162mm

8.0in
203mm

Ø9.9in
Ø252mm

8.0in
203mm

Ø6.4in
Ø162mm

Ø9.9in
Ø252mm

CABLE MÉTALLIQUE TRESSÉ
Choisissez entre un câble revêtu en acier inoxydable ou une tige pour la suspension.

FAMILLE
3 modèles disponibles

RADIATEUR IMPRIMÉ 3D
A custom design heatsink printed in aluminum allows for easy assembly

SOURCE LUMINEUSE DEL
Une source lumineuse DEL en anneau fournie un éclairage équilibré à travers le luminaire.

DIFFUSEUR IMPRIMÉ 3D
Un diffuseur sur mesure en plastique imprimé 3D possède un fini translucide pour un éclairage direct soutenu.

ABAT-JOUR TRELLIS IMPRIMÉ 3D
L'abat-jour sphostiqué en enveloppe la source lumineuse créant un halo lumineux envoûtant. Disponible en 3 formes classiques.

— 4160-LAC

IMPRESSION 3D DE MÉTAL EN DÉTAIL:

- Fusion au laser pour des résultats ultra précis
- Capacités de fabrication uniques
- Fini et texture caractéristique
- Composition ALU6060 durable

PRODUCT SPECIFICATION	4160-LAC	4160-LAR	4160-LAT
PERFORMANCE			
SYSTEM WATTAGE	15.9W	15.9W	15.9W
DELIVERED LUMENS DIRECT (4000K)*	583 LM	461 LM	374 LM
OTHER INFORMATION			
WEIGHT	7.4 LS / 3.4 KG	8.0 LBS / 3.7 KG	8.5 LBS / 3.9 KG
L70 (LUMEN MAINTENANCE) DIRECT	> 63 600 HRS	> 63 600 HRS	> 63 600 HRS
FIRE RATING	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17
MAX. LUMINANCE 45°-90° OF NADIR	1235 CD/M²	1088 CD/M²	954 CD/M²
LIGHT QUALITY	R9 > 50 (90 CRI OPTION)		

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

DISTRIBUTION LUMINEUSE

4160-LAC

4160-LAR

4160-LAT

5 ans de garantie

Visitez notre site Web pour les termes et conditions.